

FEATURES

Pump unit is made with precision mould aluminum, durable cast-iron volute, semi-open cast-iron impeller, mechanical (carbonic-ceramic) seal.

APPLICATIONS

Suitable for general purpose Pumping, irrigation, agricultural application, long distance water transportation, Cleaning, etc.



SCR-80HX

POWERED by **HONDA**




SCR-50R

POWERED by **Robin**



PERFORMANCE CURVES

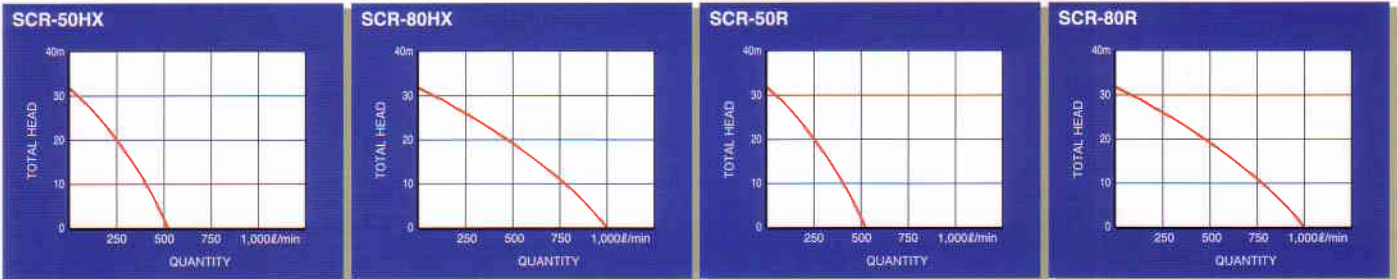

SPECIFICATIONS

Model	SCR-50HX	SCR-80HX	SCR-50R	SCR-80R
Inlet×Outlet	50×50mm (2"×2")	80×80mm (3"×3")	50×50mm (2"×2")	80×80mm (3"×3")
Max. Total Head	32m			
Suction Head	8m			
Max. Capacity	520ℓ/min	1000ℓ/min	520ℓ/min	1000ℓ/min
Engine Model	HONDA GX160		Robin EY15-3D	Robin EY20-3D
Displacement	163cm ³		143cm ³	183cm ³
Fuel Tank Capacity	3.6ℓ		2.8ℓ	3.8ℓ
Max. Output	4.0kW (5.5PS)		2.6kW (3.5PS)	3.7kW (5.0PS)
Dry Weight	26.0kg	27.5kg	24.0kg	28.0kg
Packing Measurement	L550×W390×H450mm 320units/20ft con	L550×W390×H450mm 320units/20ft con	L490×W365×H445mm 380units/20ft con	L547×W390×H448mm 320units/20ft con

*Specifications are subject to change without notice.